


<b>Description</b>	: Lithium Battery, CR123A
<b>Chemical System</b>	: Lithium Manganese Dioxide
<b>Nominal Voltage</b>	: 3.0 Volts
<b>Nominal Capacity</b>	: 1500mAh @ 10mA to 2.0V at 23°C
<b>Dimensions</b>	: Ø17 mm x 34.5 mm
<b>Terminals</b>	: Flat, Recessed Negative Terminal
<b>Jacket</b>	: PVC Resin Label
<b>Shelf Life</b>	: Up to 10 years
<b>Average Weight</b>	: App. 16g
<b>Max. Constant Current</b>	: 1500mA
<b>Max. Pulse Current</b>	: 3500mA
<b>Application</b>	: Smoke Detector, Sensors, Home Security Products, Medical Equipment
<b>Operating Temperature</b>	: -40°C to +60°C
<b>UL Standard</b>	: UL1642 (File no. MH46184) UL2054 (File no. MH25972)
<b>IEC Standard</b>	: IEC60086-4
<b>UN Standard</b>	: UN38.3

Model No.: **GPCR123A**





**Ultra+**

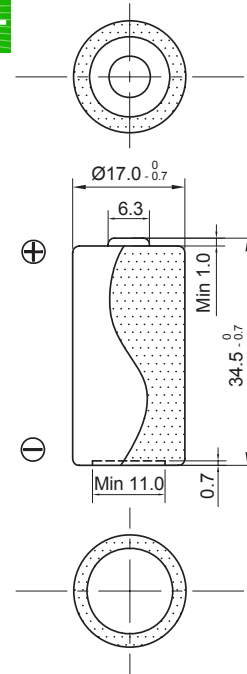

Unit : mm

### Cross References:

IEC	GP	Panasonic	Energizer	Duracell
CR17345	CR123A	CR-123A	EL123AP	DL123A

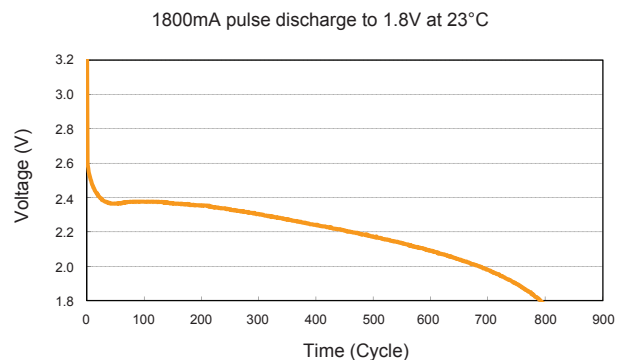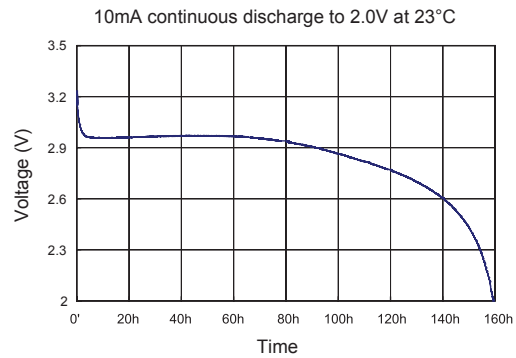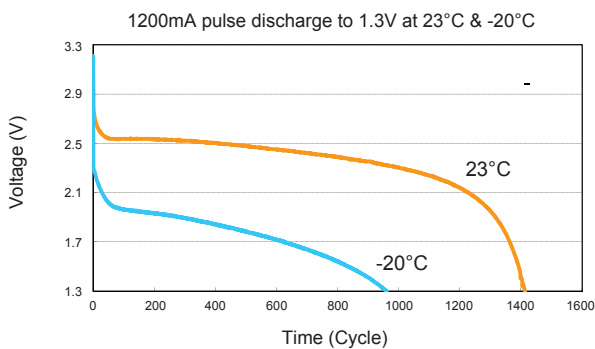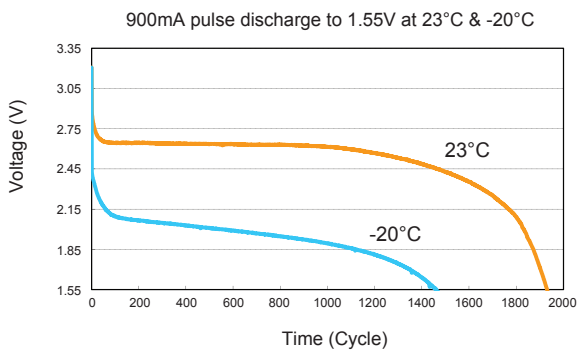

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

[www.gpbatteries.com](http://www.gpbatteries.com)